



퀵 커플링

Quick Disconnect Couplings

For Aircraft Hydraulic,
Self Sealing, Ratchet Lock,
Minimum Pressure Loss




기술제원 Technical Data

Dash Size	-4	-10	-12	-16	-32
Operating Pressure (psi)	3,000	3,000	3,000	3,000	600
Pressure Drop Max. (psi)	8	8	8	8	3
Coupling Assembly Weight (Lbs)	0.176	0.780	0.877	1.287	3.144

※ Conformance to MIL-DTL-25427

외형 치수 Dimension

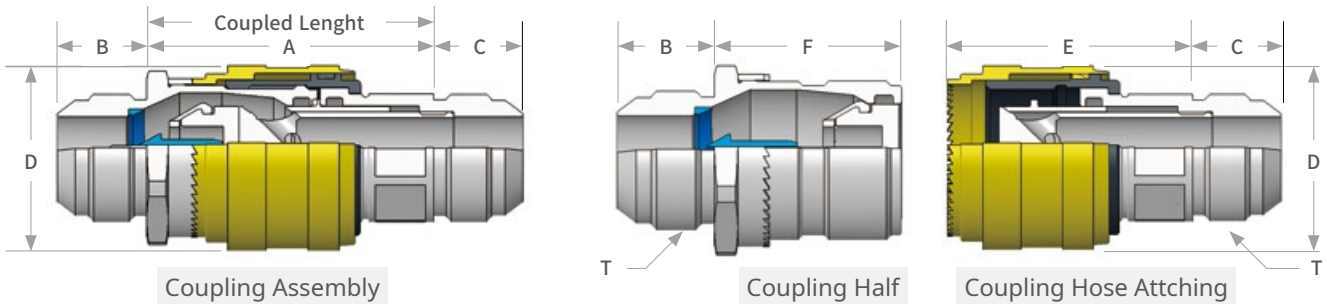

Dash Size	-4	-10	-12	-16	-32
Letter Code	E	J	K	M	R
Tube Size	1/4"	5/8"	3/4"	1"	2"
A	1.59	2.47	2.59	3.00	4.55
B	0.55	0.76	0.86	0.91	1.33
C	0.55	0.76	0.86	0.91	1.33
D Max.	0.88	1.48	1.64	1.91	3.48
E	1.13	1.92	2.27	2.54	3.55
F	0.99	1.51	1.51	1.76	2.95
Thd "T"	0.4375-20 UNJF-3A	0.8750-14 UNJF-3A	1.0625-12 UNJ-3A	1.3125-12 UNJ-3A	2.2500-12 UNJ-3A

※ All dimensions in inches