



퀵 커플링 | SH Series* Quick Disconnect Couplings

For Aircraft Hydraulic,
Self Sealing, Ratchet Lock, Minimum Pressure Loss
Material : Stainless & Aluminum




기술제원 Technical Data

※ Conformance to MIL-DTL-25427

Model	SH04	SH06	SH08	SH10	SH12	SH16	SH20	SH24	SH32
Dash Size	-4	-6	-8	-10	-12	-16	-20	-24	-32
Operating Pressure(psi)	3,000	3,000	3,000	3,000	3,000	3,000	600	600	600
Pressure Drop max(psi)	8	8	8	8	8	8	4	4	3
Coupling Assembly Weight (kg)	0.08	0.11	0.20	0.36	0.40	0.58	0.51	0.77	1.43

외형 치수 Dimension

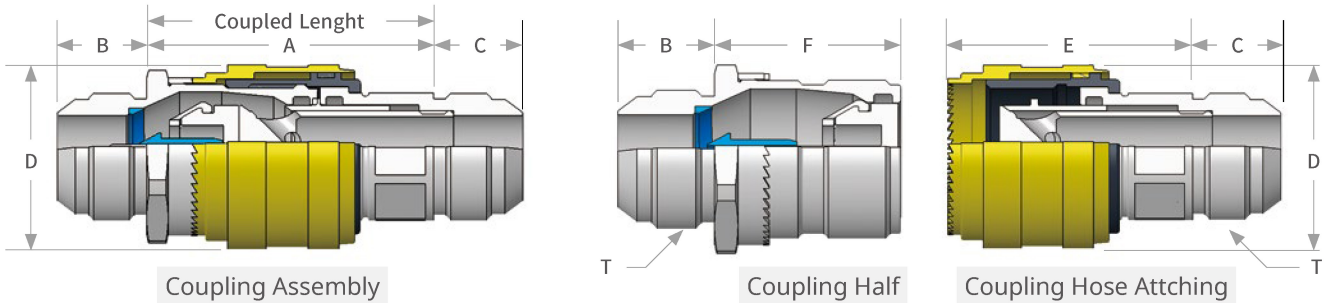

Model	SH04	SH06	SH08	SH10	SH12	SH16	SH20	SH24	SH32
DashSize	-4	-6	-8	-10	-12	-16	-20	-24	-32
LetterCode	E	G	H	J	K	M	N	P	R
TubeSize	1/4"	3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"
A	1.59	1.75	2.07	2.47	2.59	3.00	3.25	3.75	4.55
B	0.55	0.56	0.66	0.76	0.86	0.91	0.96	1.08	1.33
C	0.55	0.56	0.66	0.76	0.86	0.91	0.96	1.08	1.33
DMax	0.88	1.00	1.19	1.48	1.64	1.91	2.50	2.90	3.48
E	1.13	1.29	1.52	1.92	2.27	2.54	2.50	2.98	3.55
F	0.99	1.06	1.28	1.51	1.51	1.76	2.11	2.38	2.95
Threads "T"	0.4375-20 UNJF-3A	0.5625-18 UNJF-3A	0.7500-16 UNJF-3A	0.8750-14 UNJF-3A	1.0625-12 UNJF-3A	1.3125-12 UNJF-3A	1.6250-12 UNJF-3A	1.8750-12 UNJF-3A	2.2500-12 UNJF-3A

* SH Series : Self sealing type High quality Series

※ All dimensions in inches