



# 퀵 커플링 | SR Series\*

## Quick Disconnect Couplings


Self Sealing, Threads Connection  
 Reasonable Price, High quality  
 Material : Carbon steel



### 기술제원 Technical Data

Model	SM04	SM06	SM08	SM10	SM12	SM16	SM20	SM24	SM32
Dash Size	-4	-6	-8	-10	-12	-16	-20	-24	-32
Operating Pressure(psi)	3,000	3,000	3,000	3,000	3,000	3,000	600	600	600
Pressure Drop max(psi)	8	8	8	8	8	8	4	4	3
Coupling Assembly Weight (kg)	0.22	0.3	0.55	0.99	1.1	1.25	2.1	2.49	3.1

### 외형 치수 Dimension

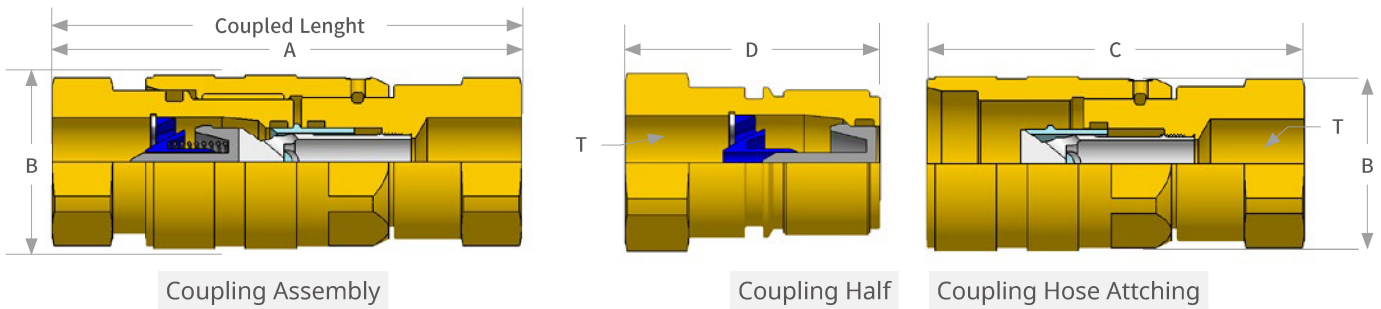

Model	SM04	SM06	SM08	SM10	SM12	SM16	SM20	SM24	SM32
Dash Size	-4	-6	-8	-10	-12	-16	-20	-24	-32
Letter Code	E	G	H	J	K	M	N	P	R
Tube Size	1/4"	3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"
A	2.93	3.23	3.82	4.56	4.71	5.45	5.9	6.81	8.27
B Max	1.05	1.19	1.42	1.77	1.86	2.17	2.84	3.29	3.95
C	2.37	2.61	3.08	3.79	3.69	4.07	4.08	4.79	5.76
D	1.57	1.65	1.98	2.32	2.61	2.94	3.38	3.81	4.71
Threads "T"	PF 1/4-19	PF 3/8-19	PF 1/2-14	PF 1/2-14	PF 3/4-14	PF 1-11	PF 1 1/4-11	PF 1 1/2-11	PF 2-11

\*SR Series : Self sealing type Reasonable price Series

※ All dimensions in inches